

EL560

For wooden or metal doors, with deadbolt and anti-friction bolt, fail locked/fail unlocked. Outside handle controlled

Meets EN1125 when used with 990000-SE panic bar

Outside handle operates when engaged by solenoid
Inside handle operates at all times


HIGH SECURITY ★★★★★

EL561

For wooden or metal doors, with deadbolt and anti-friction bolt, fail locked/fail unlocked.

Both handles electrically controlled

HIGH SECURITY ★★★★★

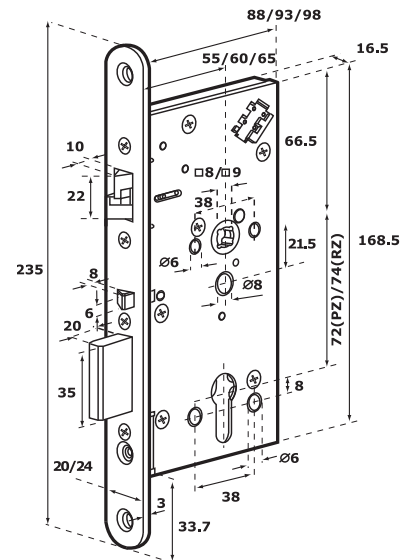

Features

- Easily reversible trigger bolt, suitable for all hands of door
- Quick change fail locked to fail unlocked
- Deadbolt and anti-friction bolt deadlock when door closes
- Meets EN179 (EL560 only) for emergency exit doors and EN1634-1 for fire resistance when used with correct exit hardware

- Tested to mechanical resistance EN12209
- Key override at all times

Monitoring

- Request to exit (RQE) on inside handle (EL560)
- Bolt position
- Door position
- Cylinder operation

Fitting

- Please add 10mm to the case depth to allow for cable socket and plug



TECHNICAL SPECIFICATION	EL560	EL561
Operating voltage +15%, -10%	12V DC to 24V DC stabilised	12V DC to 24V DC stabilised
Current max		
12V DC	350mA	350mA
24V DC	250mA	250mA
Temperature (°C)	-20 to +60	-20 to +60
Backset (mm)		
Standard	65	65
Special	55, 60, 80, 100	55, 60, 80, 100
Forend (mm)		
Standard	24	24
Special	20	20
Follower (mm)	9	9
Forend finish	SSS	SSS

ACCESSORIES	EL560	EL561
Cylinder double	–	CY327/CY322 CY337/CY332
Cylinder single	CY326 / CY321 CY336 / CY331	–
Cylinder and turn	–	CY328/CY323 CY338/CY333
Strike (included)	EA322	EA322
Handles (Futura)	60-319-SSS 60-419-SSS	60-319-SSS 60-419-SSS
Cable	807671 (inc) EA218 (optional)	807671 (inc) EA218 (optional)
Rebate set	Reb 21, 22 or 23	Reb 21, 22 or 23
Spindle converter (8-9mm) included	807227	807227

NB. Unless otherwise stated all electro-mechanical lockcase cylinders will be supplied as ABLOY PROTEC

SSS: Satin stainless steel

For handles please see pages 24-27.

EN1125 solution	EL560
Panic bar	990000-SE



New Product