

Electric Strikes

GK1279 Rim Strike Series

Surface Mount Strikes for Pullman Latch Exit Devices



GK1279

GK1279M


GK1279 series surface mount electric rim strikes are suitable for indoor applications and are designed specifically for emergency exit latch or push pad. The body construction is stainless steel and is field selectable for fail-safe or fail-secure operation.

Standard Features

- Field selectable 12/24VDC
- Field reversible fail-secure or fail-safe
- Static strength 1,500 lbs (680Kg)
- Dynamic strength 70 ft-lbs
- Endurance rating 250,000 cycles factory tested
- Brushed stainless steel finish (US32D)
- Latch monitor (For model with suffix M)

Specification



- Operating Voltage: 12/24VDC
- Current Draw: 540mA/12VDC, 270mA/24VDC
- Operating Temperature: 14°F to 120°F (-10°C~+49°C)
- Humidity: 0~85% non-condensing
- Housing Thickness: 3/4" (19mm)
- Field Reversible Fail-Safe or Fail-secure

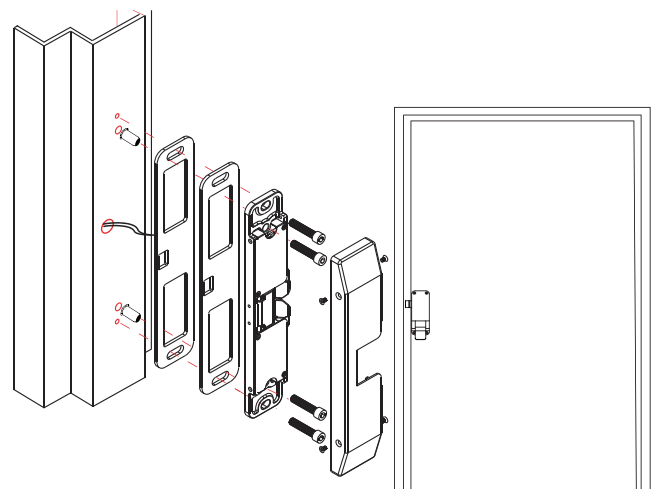


GK1276/90 Series ANSI Electric Rim Strikes

Models	Voltage (VDC)	Current Draw	Latch Monitor	Housing Thickness	Field Reversible Fail-Safe Or Fail-Secure
GK1279	12/24	540mA/12VDC 270mA/24VDC	—	3/4" (19mm)	●
GK1279M	12/24	540mA/12VDC 270mA/24VDC	●	3/4" (19mm)	●

Dimensions

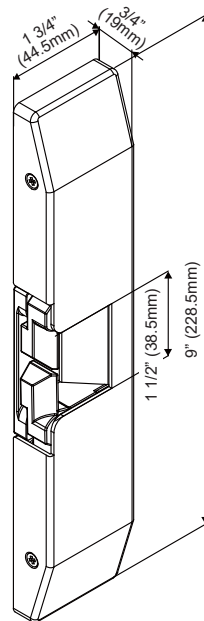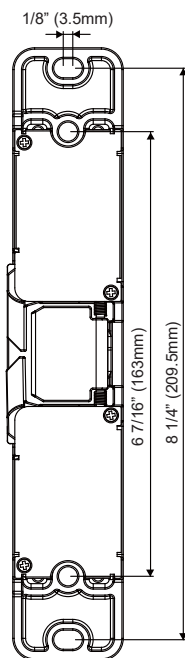


GK1279

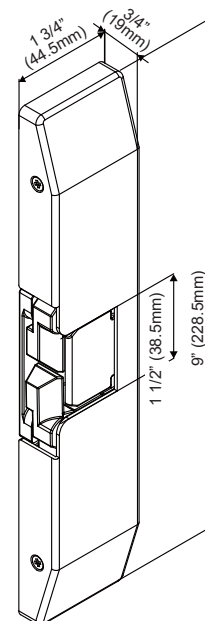

GK1279M
(Model with Latch Monitor)

Changing Fail-Safe / Fail-Secure

Remove locking screw #1, loosen, slide and tighten sliding screw #2. Reinsert and tighten locking screw #1 to the desired fail-safe or fail-secure setting.

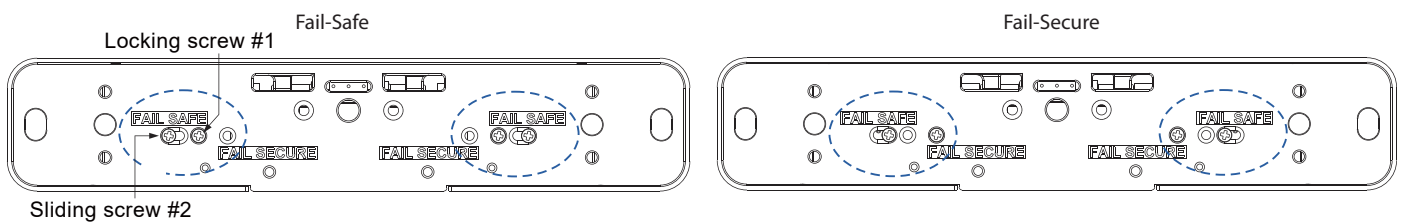

Warranty

The product is warranted against defects in material and workmanship while used in normal service for a period of 3 years from the date of sale to the original client. The GEM policy is one of continual development and improvement; therefore GEM reserves the right to change specifications without notice.